



Lighting Design Manufacturing Service

www.edison-opto.com

High Power LEDs

Edixeon® S EDEx-1LS1-FR Series Datasheet



Features :

- More energy efficient than incandescent and most halogen lamps
- Low voltage operation
- Instant light
- Long operating life
- Reflow process compatible.



Lighting Design Manufacturing Service

Table of Contents

General Information.....	3
Introduction.....	3
Product Nomenclature	3
Mechanical Dimensions.....	4
Emitter Dimensions.....	4
Star Dimensions	4
Absolute Maximum Ratings	5
Luminous Flux Characteristic.....	6
Characteristics	7
Optical Characteristics	7
Electrical Characteristics.....	7
Characteristic Curve	8
Spectrum	8
Luminous Flux & Forward Current.....	8
CCT & Forward Current	8
Radiation Diagram.....	8
Forward Voltage & Forward Current	8
CCT & Junction Temperature	9
Luminous Flux & Junction Temperature.....	9
Revision History	10
About Edison Opto	10



Lighting Design Manufacturing Service

General Information

Introduction

Edixeon® S series emitters are one of the highest flux LEDs in the world by Edison Opto. Edixeon® S Series emitters are designed to satisfy more and more Solid-State lighting High Power LED applications for brilliant world such as flash light, indoor and outdoor decoration light. Edixeon® S Series emitters are designed by particular package for reflow process application. 1W Edixeon® S Series white has typical 100 lumens @350mA.

Unlike most fluorescent sources, Edixeon® S Series contains no mercury and has more energy efficient than other incandescent light source.

Product Nomenclature

The following table describes the available color, power, and lens type. For more flux and forward voltage information, please consult the Bin Group document.

Table 1. Edixeon® S series nomenclature

<u>E</u> <u>D</u>	<u>E</u>	<u>W</u>	-	<u>1</u>	<u>L</u>	<u>S</u>	<u>1</u>	-	<u>F</u>	<u>R</u>	-	<u>A</u>	<u>B</u>	<u>1</u> <u>6</u>
X1	X2	X3		X4	X5	X6	X7		X8	X9		X10	X11	X12
X1 LED Item		X2 Module		X3 Emitting Color		X4 Power		X5 Lens Item						
Code	Type	Code	Type	Code	Type	Code	Type	Code	Type	Code	Type			
ED	Edixeon®	E	Emitter	W	Cool White	1	1W	L	Lambertan(140°)					
		S	Star	H	Neutral White									
				X	Warm White									
X6~X9 Shape Item		X10 Al PCB Type		X11 Al PCB Color		X12 PCB Thickness								
Code	Type	Code	Type	Code	Type	Code	Type							
--	--	A	Star	B	Black	10	1.0mm							
		B	Square(25x25mm)			16	1.6mm							
		C	Square(30x30mm)			20	2.0mm							

Mechanical Dimensions

Emitter Dimensions

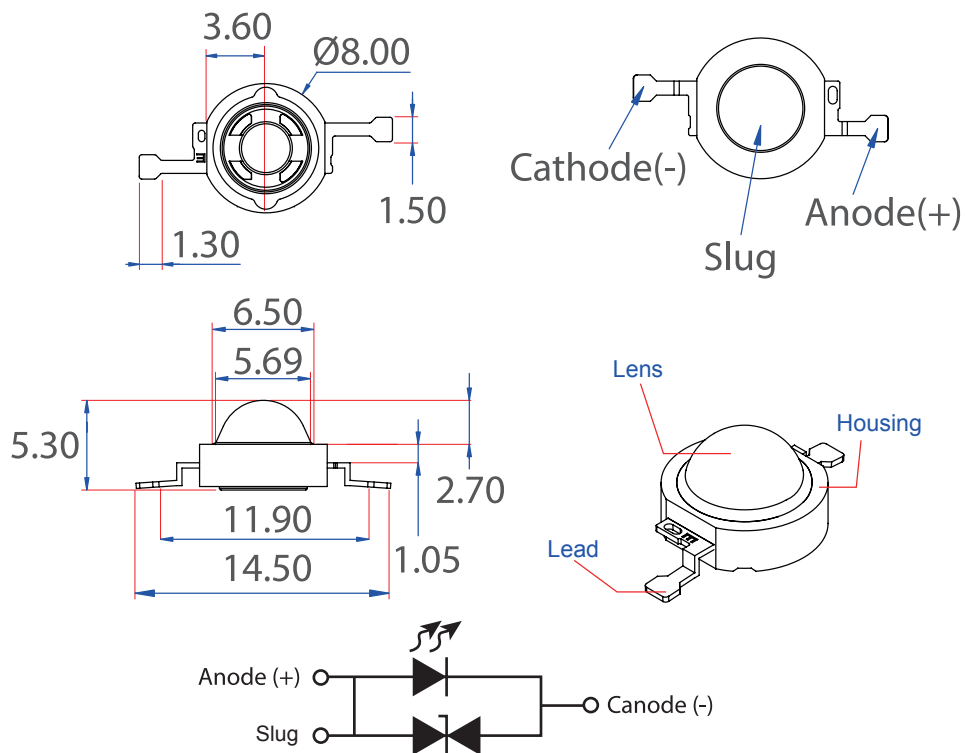


Figure 1. Edixeon® S series dimensions

Notes:

1. All dimensions are in mm.
2. Drawings are not to scale.
3. It is strongly recommended to apply on electrically isolated heat conducting film between the slug and contact surfaces.

Star Dimensions

EDSx-1LSx-xx-Ax16

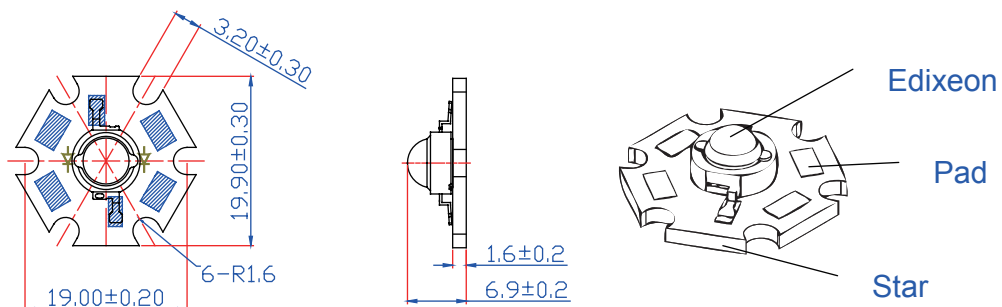


Figure 2. Edixeon® star dimensions

Note:

All dimensions are in mm.

Absolute Maximum Ratings

The following tables describe the characteristics of Edixeon® S EDEX-1LS1-FR Series under various current.

Table 2. Absolute maximum ratings for Edixeon® S EDEX-1LS1-FR series

Parameter	Rating	Unit	Symbol
DC Forward Current	350	mA	I_F
Peak pulse current; ($t_p \leq 100\mu s$, Duty cycle=0.25)	500	mA	
Reverse Voltage	5	V	V_R
Drive Voltage	5	V	V_D
LED junction Temperature	125	°C	T_J
Operating Temperature	-30 ~ +110	°C	
Storage Temperature	-40 ~ +120	°C	
Soldering Temperature	260	°C	
ESD Sensitivity	4,000	V	V_B
Manual Soldering Time at 360°C(Max.)	5	Sec.	

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum at all time.
2. LEDs are not designed to be driven in reverse bias.
3. Allowable reflow cycles are 3 times for each LED.
4. t_p : Pulse width time



Lighting Design Manufacturing Service

Luminous Flux Characteristic

The following tables describe flux of Edixeon® S EDEX-1LS1-FR Series under various current and different color.

Table 3. Luminous flux characteristic at $I_f=350\text{mA}$, $T_j=25^\circ\text{C}$

Power Item	Part Name	Color	Min Luminous Flux @350mA		Unit
			Group	Flux(lm)	
1W	EDEW-1LS1-FR	Cool White	U2	90	lm
			U3	100	lm
	EDEH-1LS1-FR	Neutral White	T3	80	lm
			U1	86.5	lm
	EDEX-1LS1-FR	Warm White	T1	66.5	lm
			T2	70	lm

Note:

Flux is measured with an accuracy of $\pm 10\%$

Characteristics

Optical Characteristics

Table 4. Optical characteristics at $I_f=350\text{mA}$ and $T_j=25^\circ\text{C}$

Power Item	Part Name	Color	$V_f(\text{V})$			CRI	Viewing Angle (Degree)
			Min.	Typ.	Max.		
1W	EDEW-1LS1-FR	Cool White	3.1	3.4	3.7	68	130
	EDEH-1LS1-FR	Neutral White	3.1	3.4	3.7	75	130
	EDEX-1LS1-FR	Warm White	3.1	3.4	3.7	80	130

Notes:

1. Forward voltage is measured with an accuracy of $\pm 0.1\text{V}$
2. CRI is measured with an accuracy of ± 5
3. Emission angle is measured with an accuracy of ± 10 degree

Electrical Characteristics

Table 5. Electrical Characteristics at $T_j=25^\circ\text{C}$

Lens Item	Part Name	Color	CCT (K)		Thermal Resistance ($^\circ\text{C/W}$)
			Min.	Max.	
Lambertian	EDEW-1LS1-FR	Cool White	5,000	10,000	10
	EDEH-1LS1-FR	Neutral White	3,800	5,000	10
	EDEX-1LS1-FR	Warm White	2,670	3,800	10

Note:

CCT is measured with an accuracy of $\pm 5\%$

Characteristic Curve

Spectrum

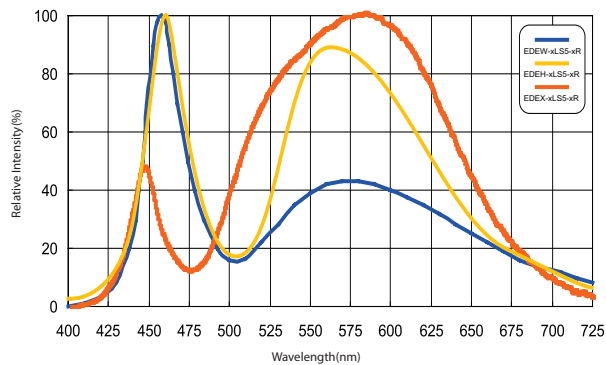


Figure 3. Cool white, Neutral white and Warm white color spectrum at $T_j=25^{\circ}\text{C}$

Radiation Diagram

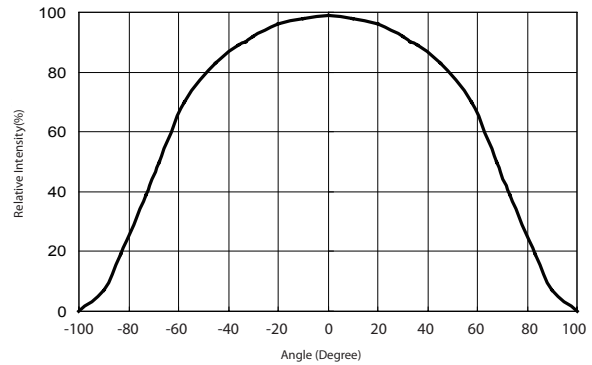


Figure 4. Emission angle

Luminous Flux & Forward Current

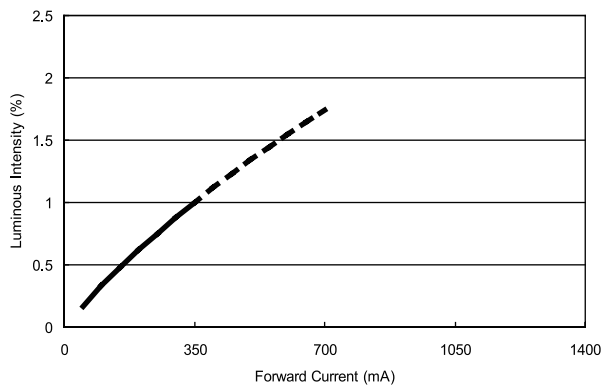


Figure 5. Forward Current & Luminous Intensity at $T_j=25^{\circ}\text{C}$

Forward Voltage & Forward Current

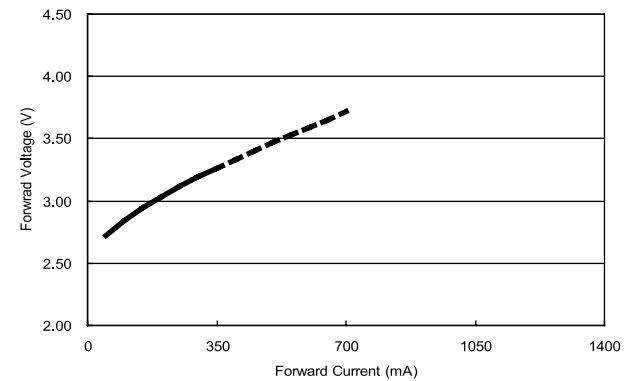


Figure 6. Forward Current & Forward Voltage at $T_j=25^{\circ}\text{C}$

CCT & Forward Current

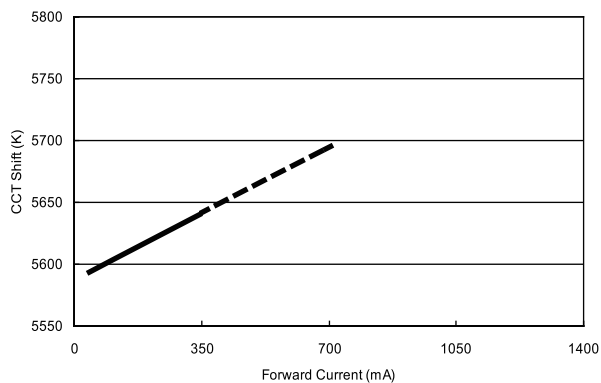


Figure 7. Forward Current & CCT at $T_j=25^{\circ}\text{C}$ for Cool White

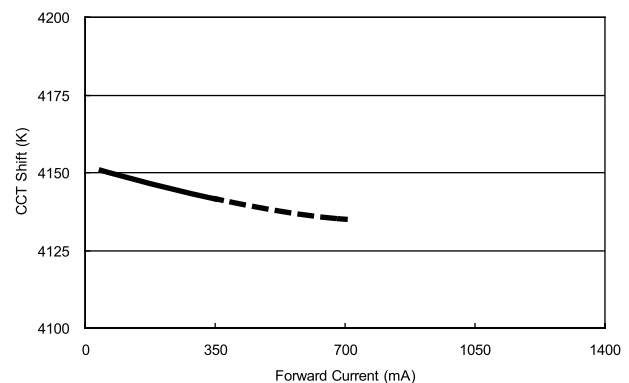


Figure 8. Forward Current & CCT at $T_j=25^{\circ}\text{C}$ for Neutral White

Luminous Flux & Junction Temperature

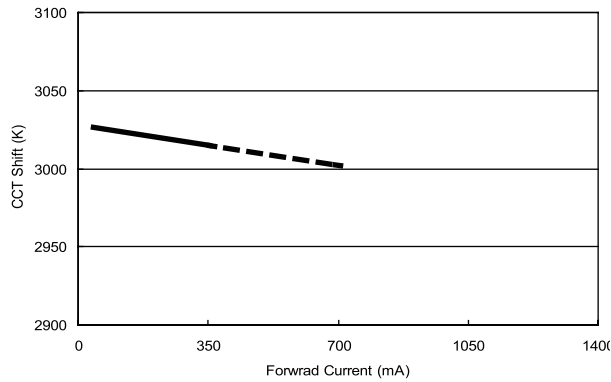


Figure 9. Forward Current & CCT at $T_j=25^\circ\text{C}$ for Warm White

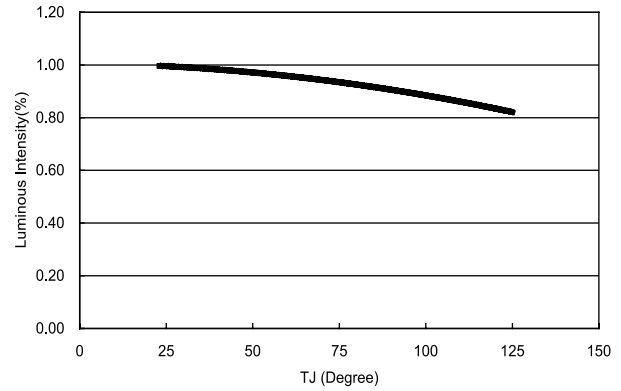


Figure 10. Junction temperature & lumens intensity for Cool White, Neutral White, Warm White

CCT & Junction Temperature

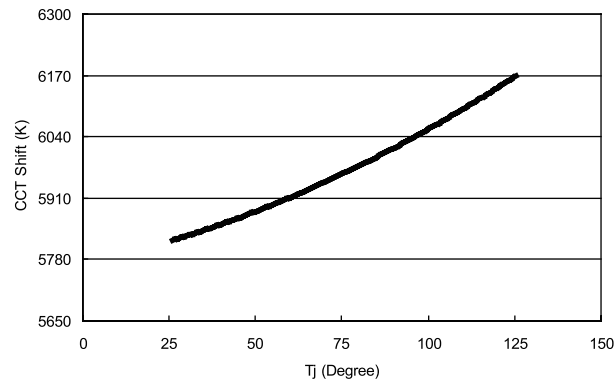


Figure 11. Junction temperature & CCT Shift for Cool White

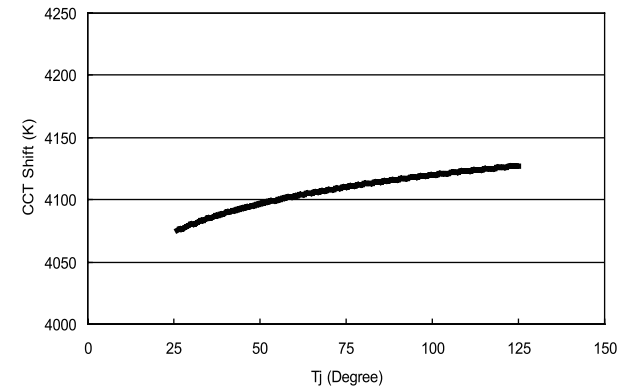


Figure 12. Junction temperature & CCT Shift for Neutral White

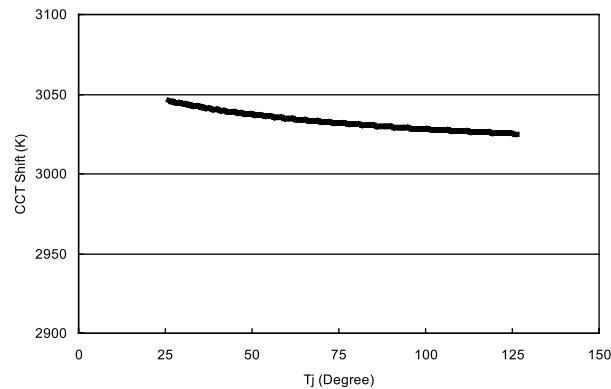


Figure 13. Junction temperature & CCT Shift for Warm White

Revision History

Table 6. Revision history of Edixeon® S EDEx-1LS1-FR series datasheet

Version	Description	Release Date
1	1. Establish a datasheet	2012/07/03

About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at www.edison-opto.com

Copyright©2012 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

www.edison-opto.com

For general assistance please contact:
service@edison-opto.com.tw

For technical assistance please contact:
LED.Detective@edison-opto.com.tw