



Lighting Design Manufacturing Service

www.edison-opto.com.tw

PLCC Series

ET-3528R-133W-R

ET-3528A-133W-R

ET-3528Y-133W-R

Datasheet

Ultra high luminous efficacy, combined with the flexibility in design due to its slim and miniature size, PLCC LED Series are optimized to be used as lighting for signboard.

Features :

- High luminous Intensity and high efficiency
- Based on Blue/Green : InGaN, Red : AlGaInP technology
- Wide viewing angle : 120°
- Excellent performance and visibility
- Suitable for all SMT assembly methods
- IR reflow process compatible
- Environmental friendly; RoHS compliance

Typical Applications

- Signal and Symbol Luminaire
- Indoor and Outdoor Displays
- Backlighting (illuminated advertising, general lighting)
- Interior Automotive Lighting





Lighting Design Manufacturing Service

Table of Contents

• Product Nomenclature.....	3
• Environmental Compliance.....	3
• LED Package Dimension and Polarity.....	4
• Absolute Maximum Ratings.....	5
• Luminous Intensity Characteristics.....	5
• Forward Voltage Characteristics.....	6
• JEDEC Moisture Sensitivity.....	7
• Reliability Test Items	8
• Color Spectrum and Radiation Pattern.....	9
• Optical and Electrical Characteristics.....	11
• Product Soldering Instructions.....	12
• Reflow Profile.....	13
• Product Packing Information.....	14
• Precaution for Use.....	16
• Forward Voltage Ranks.....	17
• Luminous Intensity Ranks.....	17
• Dominant Wavelength Ranks.....	17

Product Nomenclature

The following table describes the available color, package size, and chip quantity.

E T - 3528 R - 1 3 3 W - R

X1		X2		X3	X4	X5	X6	X7	X8
X1 LED Item		X2 Package		X3 Emitting Color		X4 Chip Quantity		X5~X6 Serial No.	X7 Feature
Code	Type	Code	Type	Code	Type	Code	Type		Code Type
EdisonT op LED		3528	3.5x2.8mm	W	Cool White	1	1pcs		W White surface
		5050	5.0x5.0mm	H	Neutral White	3	3pcs		B Black surface
				X	Warm White	A	0.5W		D Black housing
				R	Red	B	1W		
				A	Amber(615nm)				
				Y	Yellow (590nm)				
X8									
Serial No.									
Code	Type								
R	Reverse Polarity								

Table 1 : PLCC 3528 series Nomenclature

Environmental Compliance

PLCC 3528 series are compliant to the Restriction of Hazardous Substances Directive or RoHS. The restricted materials including lead, mercury cadmium hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ether (PBDE) are not used in PLCC 3528 series to provide an environmentally friendly product to the customers.

LED Package Dimension and Polarity

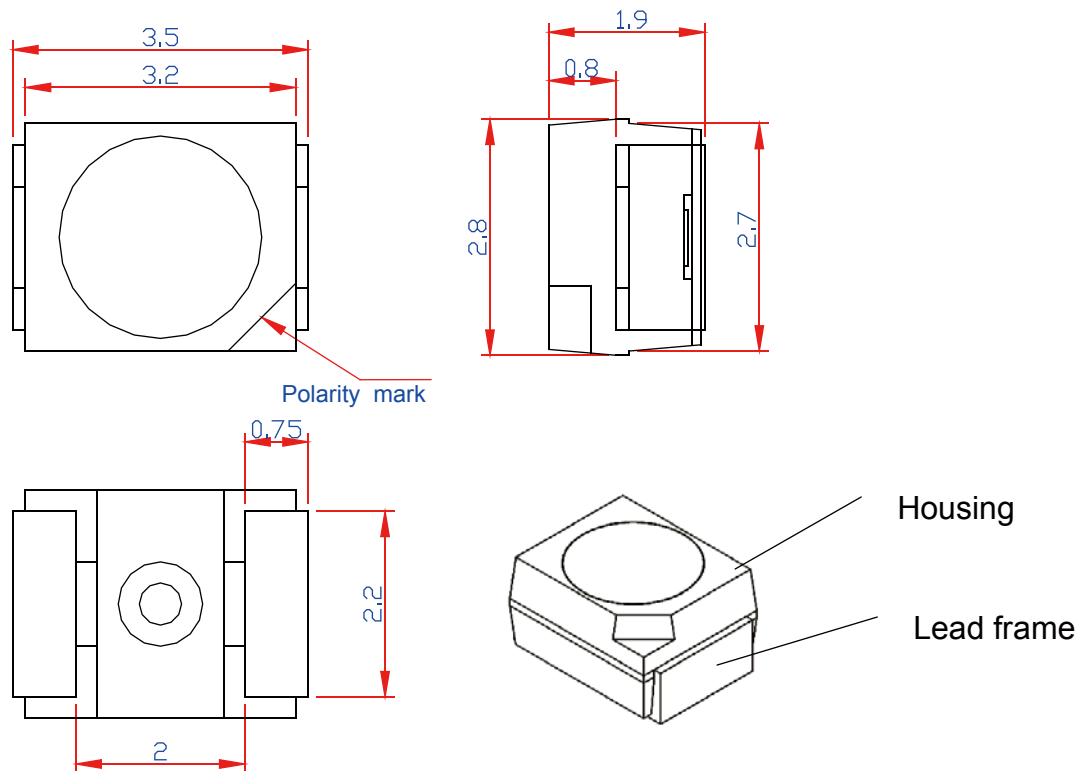


Figure 1. PLCC 3528 series Dimension

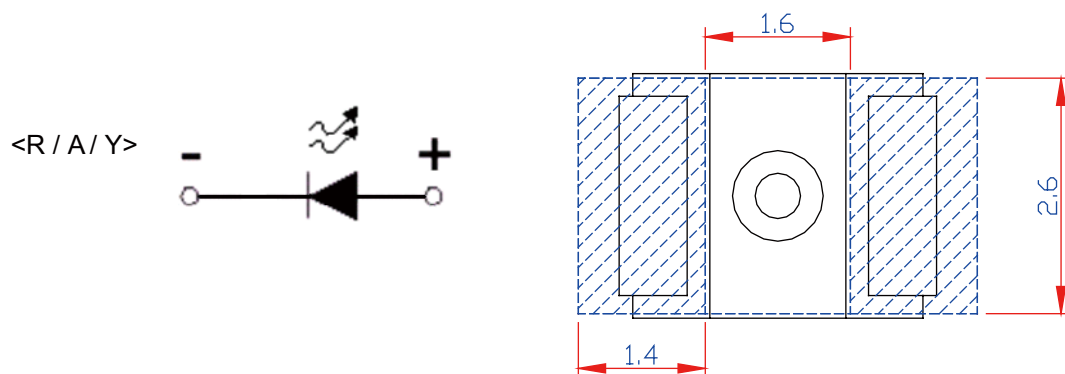


Figure 2. PLCC 3528 series circuit diagram and recommended soldering pad

Notes:

1. All dimensions are measured in mm.
2. Tolerance : ± 0.20 mm

Absolute Maximum Ratings

The following table describe absolute maximum ratings of PLCC 3528 series.

Parameter	Rating (R)/(A)/(Y)	Rating (T) / (B)	Units	Symbol
Forward Current	35	30	mA	I_F
Pulse Forward Current ($t_p \leq 100\mu s$, Duty cycle=0.25)	80	100	mA	
Reverse Current	10	10	μA	I_R
Reverse Voltage	5	5	V	V_R
Forward Voltage	2.8	3.7	V	V_F
Power Dissipation	100	110	mW	
LED Junction Temperature	115		$^{\circ}C$	T_J
Operating Temperature	$-30 \sim +85$		$^{\circ}C$	
Storage Temperature	$-40 \sim +100$		$^{\circ}C$	
Soldering Temperature	255~260		$^{\circ}C$	
Manual Soldering at 350 $^{\circ}C$ (Max.)	3		Sec	

Table 2 : Absolute maximum ratings for PLCC 3528 series

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum at all time.
2. LEDs are not designed to be driven in reverse bias.
3. t_p : Pulse width time

Luminous Intensity Characteristics

The following table describes luminous intensity of PLCC 3528 series.

Part Name	Color	Luminous intensity(mcd)			Luminous Flux Typ.(lm)
		Min.	Typ.	Max.	
ET-3528R-133W-R	Red	300	500	--	1.6
ET-3528A-133W-R	Amber	300	500	--	1.6
ET-3528Y-133W-R	Yellow	300	500		1.6

Table 3 : Luminous intensity characteristics at $I_F=20mA$ and $T_a=25^{\circ}C$ for PLCC 3528 series

Notes:

Luminous intensity is measured with an accuracy of $\pm 10\%$

Forward Voltage Characteristics

The following table describes luminous intensity of PLCC 3528 series.

Part Name	Color	Luminous intensity(mcd)			Luminous Flux Typ.(lm)
		Min.	Typ.	Max.	
ET-3528R-133W-R	Red		2.1	2.5	V
ET-3528A-133W-R	Amber		2.1	2.5	V
ET-3528Y-133W-R	Yellow		2.1	2.5	V

Table 4 : Forward voltage characteristics at IF=20mA and Ta=25°C for PLCC 3528

Notes:

Luminous intensity is measured with an accuracy of $\pm 10\%$

JEDEC Information

JEDEC is used to determine what classification level should be used for initial reliability qualification. Once identified, the LEDs can be properly packaged, stored and handled to avoid subsequent thermal and mechanical damage during the assembly solder attachment and/or repair operation. The present moisture sensitivity standard contains six levels, the lower the level, the longer the devices floor life. PLCC 3528 series are certified at level 2a. This means PLCC 3528 series have a floor life of 4 weeks before PLCC 3528 series need to re-baked.

Level	Floor Life		Soak Requirements			
	Time	Conditions	Standard		Accelerated Environment	
			Time (hours)	Conditions	Time (hours)	Conditions
2a	4 weeks	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	696 +5/-0	$30^{\circ}\text{C} / 60\% \text{ RH}$	120 +1/-0	$60^{\circ}\text{C} / 60\% \text{ RH}$

Table5. JEDEC characteristics for TS1003

Leve	Floor Life		Soak Requirements			
	Time	Condition	Standard		Accelerated Environment	
			Time (hours)	Condition	Time (hours)	Condition
1	Unlimited	$\leq 30^{\circ}\text{C} / 85\% \text{ RH}$	168 +5/-0	$85^{\circ}\text{C} / 85\% \text{ RH}$		
2	1 year	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	168 +5/-0	$85^{\circ}\text{C} / 60\% \text{ RH}$		
2a	4 weeks	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	696 ¹ +5/-0	$30^{\circ}\text{C} / 60\% \text{ RH}$	120 +1/-0	$60^{\circ}\text{C} / 60\% \text{ RH}$
3	168 hours	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	192 ¹ +5/-0	$30^{\circ}\text{C} / 60\% \text{ RH}$	40 +5/-0	$60^{\circ}\text{C} / 60\% \text{ RH}$
4	72 hours	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	96 ¹ +5/-0	$30^{\circ}\text{C} / 60\% \text{ RH}$	20 +5/-0	$60^{\circ}\text{C} / 60\% \text{ RH}$
5	48 hours	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	72 ¹ +5/-0	$30^{\circ}\text{C} / 60\% \text{ RH}$	15 +5/-0	$60^{\circ}\text{C} / 60\% \text{ RH}$
5a	24 hours	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	48 ¹ +5/-0	$30^{\circ}\text{C} / 60\% \text{ RH}$	10 +5/-0V	$60^{\circ}\text{C} / 60\% \text{ RH}$
6	Time on tabel (TOL)	$\leq 30^{\circ}\text{C} / 60\% \text{ RH}$	TOL	$30^{\circ}\text{C} / 60\% \text{ RH}$		

Notes:

The standard soak time includes a default value of 24 hours for semiconductor manufacturer's exposure time (MET) between bake and bag, and includes the maximum time allowed out of the bag at the distributor's facility.

Reliability Test Items

The following table describes operating life, mechanical, and environmental tests performed on PLCC 3528 series.

Stress Tes	Stress Conditions	Stress Duration	Failure Criteria
Temperature and Humidity	60°C / 60%RH	120 hours	No catastrophics
IR Reflow	Peak temp.=255~260°C*3 times	3 times	

Table 6. Reliability Test 1

Stress Tes	Stress Conditions	Stress Duration	Failure Criteria
Room Temperature Operating Life	25°C, IF= max DC (Note 2)	1000 hours	No catastrophics
High Temperature and high Humidity Life	85°C / 85%RH, IF = 5 mA	1000 hours	
Low Temperature Storage	-40°C	1000 hours	
High Temperature and high Humidity Storage	85°C / 85%RH	1000 hours	
Ambient Temperature Life	25°C, IF = 20 mA	1000 hours	
Temperature Cycle	-40°C/100°C ,30 min dwell <15min transfer	200 cycles	
Thermal Shock	-40 / 100°C, 15 min dwell<10 sec transfer	200 cycles	

Table 7. Reliability Test 2

Notes:

1. Reliability test 2 is performed after reliability test 1.
2. Depending on the maximum derating curve.
3. Failure Criteria:
Electrical failures
 V_F Shift $\geq 10\%$
Luminous Intensity
 I_V Decay $\geq 35\%$

Color Spectrum and Radiation Pattern

• Emission Angle Characteristics

Part Name	Color	2 θ ½(Typ.) Lambertian	Unit
ET-3528x-133W-R	-	120	Deg.

Table 8. Emission angle Characteristics at $I_f=20\text{mA}$ and $T_a=25^\circ\text{C}$ for PLCC 3528 series

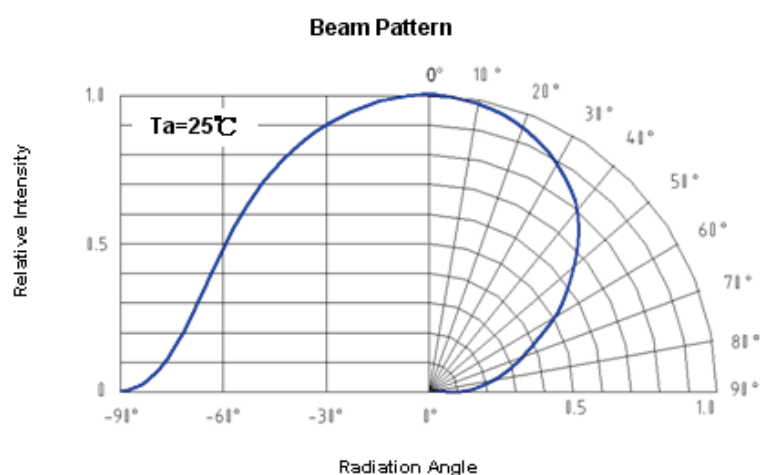


Figure 3: Beam pattern diagram for PLCC 3528 series

• Color Temperature or Dominant Wavelength Characteristics

Part Name	Color	CCT			Unit
		Min.	Typ.	Max.	
ET-3528R-133W-R	Red	620	625	630	nm
ET-3528A-133W-R	Amber	610	615	620	nm
ET-3528Y-133W-R	Yellow	585	590	595	nm

Table 9. Dominant Wavelength or Peak wavelength or Color Temperature Characteristics at $I_f=20\text{mA}$ and $T_a=25^\circ\text{C}$ for PLCC 3528 series

Notes:

Wavelength is measured with an accuracy of $\pm 1\text{nm}$

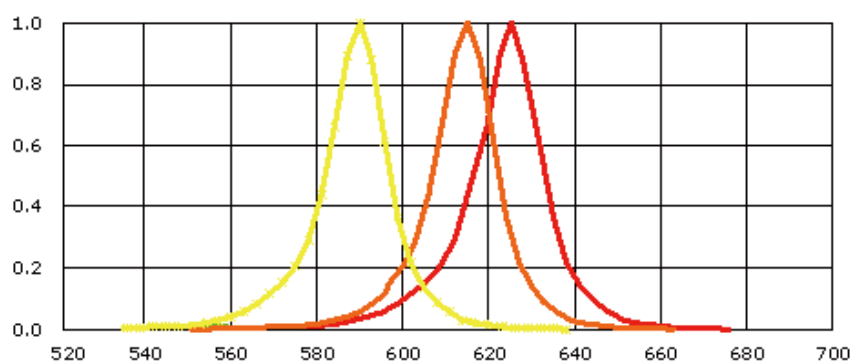


Figure 4: Wavelength & relative intensity for PLCC 3528 series

Optical and Electric Characteristics

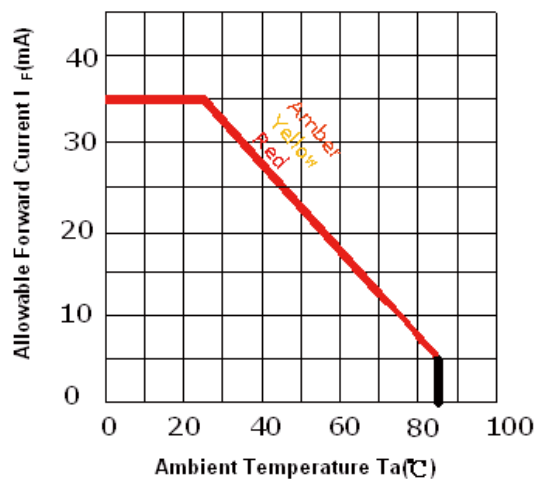


Figure 5: Ambient temperature & forward current for PLCC 3528 series

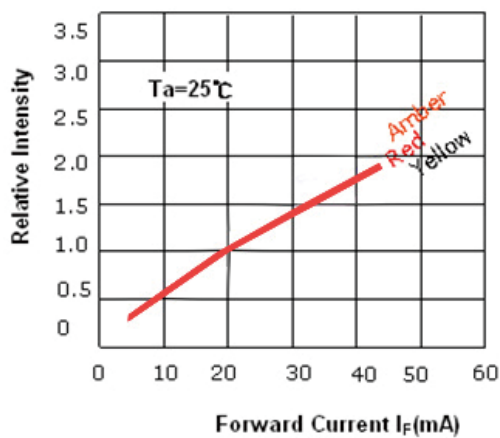


Figure 6: Forward current & relative intensity for PLCC 3528 series

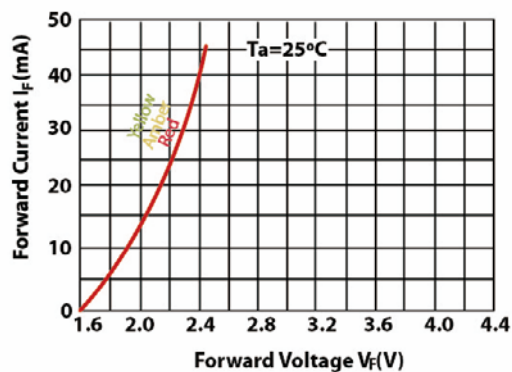


Figure 7: Forward voltage & forward current for PLCC 3528 series

Product Soldering Instructions

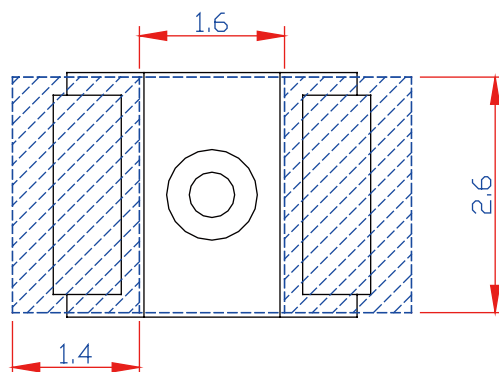


Figure 8: Pad Dimension

Notes:

All dimensions are measured in mm.

Reflow Profile

The following reflow soldering profiles are provided for reference. It is recommended that users follow the recommended soldering profile provided by the manufacturer of the solder paste used

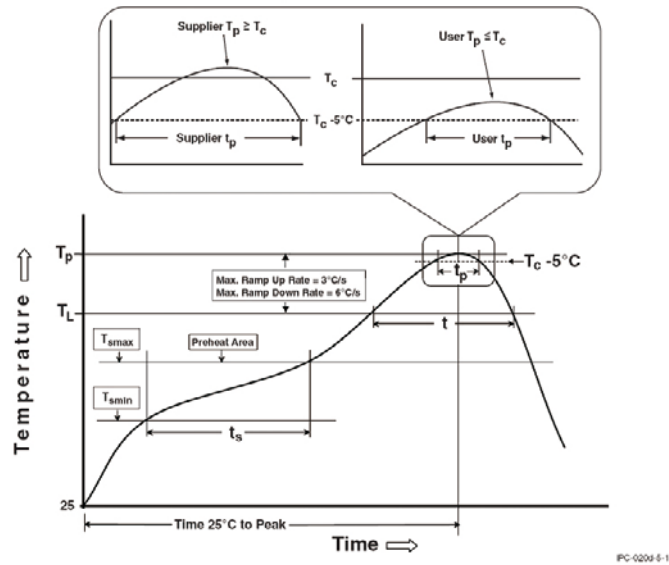


Table 10. Table of Classification Reflow Profiles

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat & Soak		
Temperature min (Tsmin)	100°C	150 °C
Temperature max (Tsmax)	150°C	200 °C
Time (Tsmin to Tsmax) (ts)	60-120 seconds	60-120 seconds
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3 °C/second max.
Liquidous temperature (TL)	183 °C	217 °C
Time at liquidous (tL)	60-150 seconds	60-150 seconds
Peak package body temperature (Tp)*	230 °C ~235°C *	255 °C ~260 °C *
Classification temperature (Tc)	235°C	260 °C
Time (tp)** within 5 °C of the specified classification temperature (Tc)	20** seconds	30** seconds
Average ramp-down rate (Tp to Tsmax)	6°C/second max.	6°C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.

Notes:

* Tolerance for peak profile temperature (Tp) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum.

Product Packaging Information

• Tapeing Reel

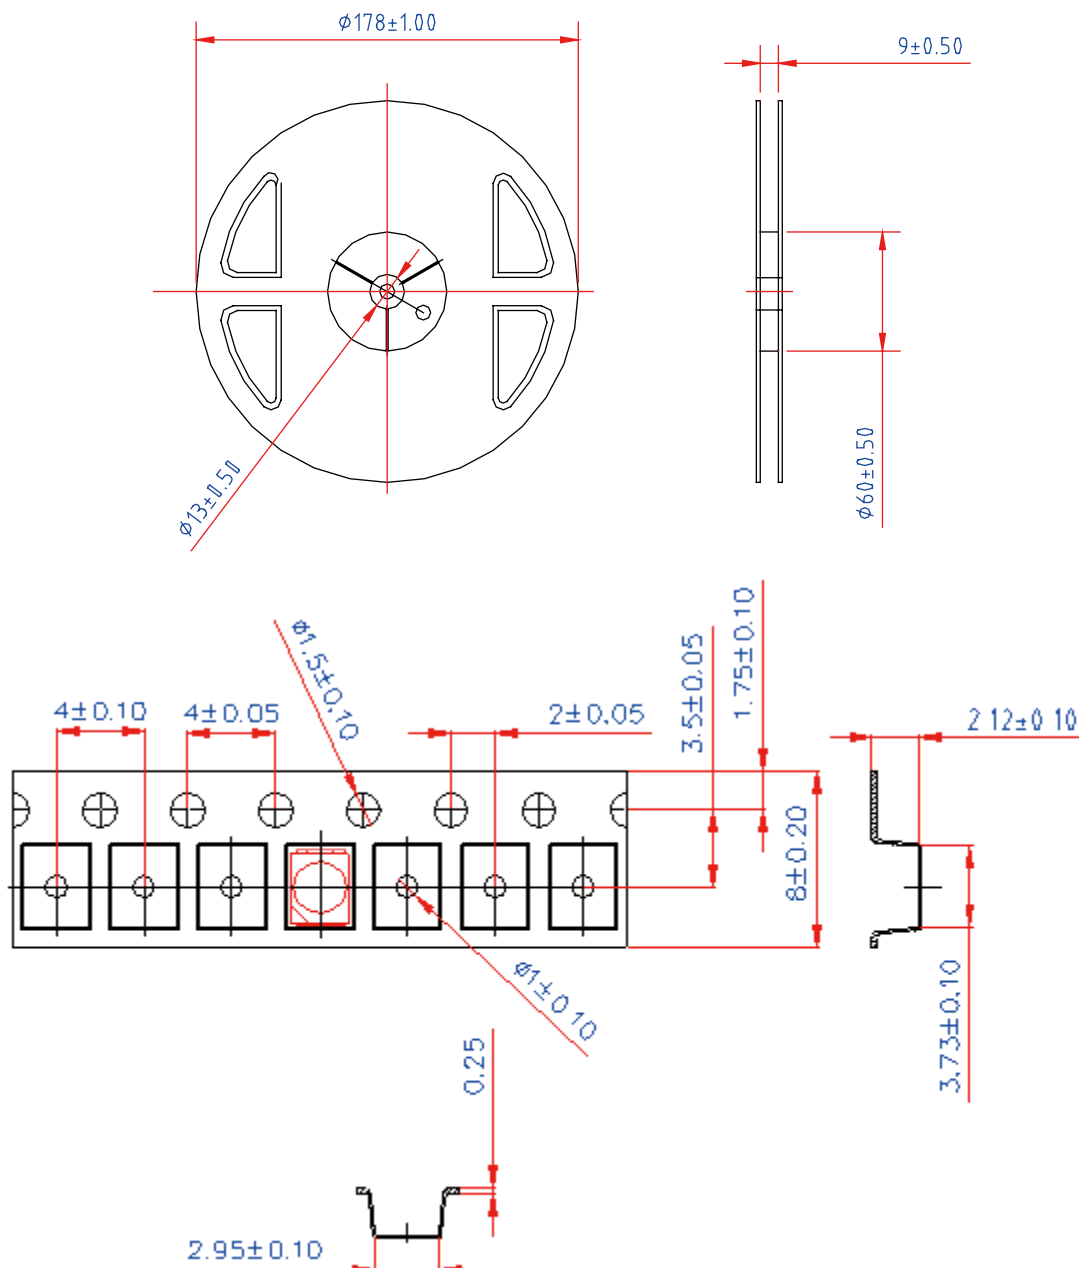


Figure 9: Taping reel dimensions

• Packaging

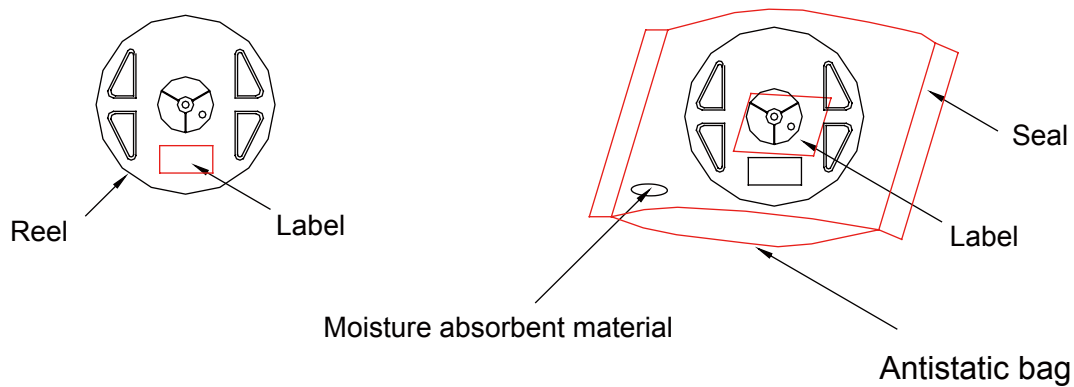


Figure 10: Packaging diagram

• Package Label

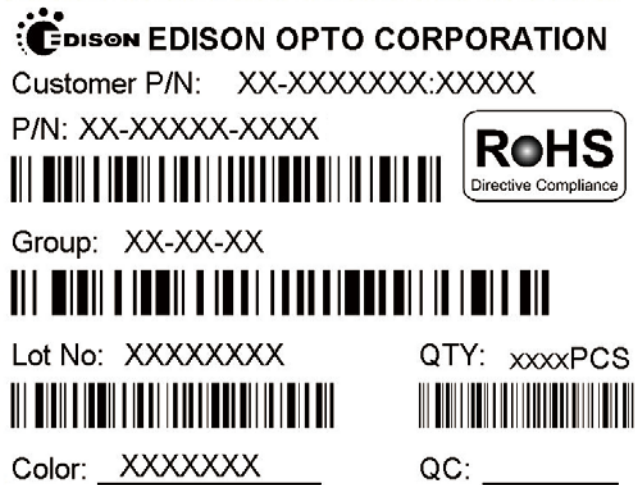


Figure 11: Package label

Item	Quantity	Total	Dimensions(mm)
Reel	2,000pcs	2,000pcs	Diameter=178
Inner box	5 reels	10,000pcs	240*235*67
Outer box	5 inner boxes	50,000pcs	353*254*256

Table 11: Package dimensions and quantity

Precaution for Use

Storage

1.1 Before opening the package

The LEDs should be kept at $<40^{\circ}\text{C}$ & $<90\%\text{RH}$. The LEDs should be used within a year. When storing the LEDs, moisture proof package with absorbent material (silica gel) is recommended.

1.2 After opening the package

The LEDs should be kept at $\leq 30^{\circ}\text{C}$ & $\leq 60\%\text{RH}$. The LEDs should be soldered within 4 weeks after opening the moisture proof package.

If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with moisture proof package within absorbent material (silica gel). It is also recommended to return the unused LEDs to the original moisture proof package and to seal the moisture proof package again.

If the moisture absorbent material (silica gel) vapors or expires the expiration date, baking treatment should be performed by using the following conditions : 60°C for 20 hours.

The LEDs electrode and leadframe comprise a silver plated copper alloy. The silver surface may be affected by environments. Please avoid conditions which may cause the LEDs being corroded or discolored. The corrosion or discoloration might lower solderability or affect optical characteristics.

Please avoid rapid transition in ambient temperature, especially in high humidity environments where condensation can occur.

Static electricity

The products are sensitive to static electricity and highly taken care when handling them.


Static electricity or surge voltage will damage the LEDs. It is recommended to wear an anti-electrostatic wristband or an anti-electrostatic glove when handling the LEDs.

All devices, equipments and machinery must be properly grounded. It is recommended that measures be taken against surge voltage to the equipment that mounts the LEDs.

Pick and Place

Recommended conditions: Outer nozzle $> \phi 2.4 \text{ mm}$

*Avoid direct contact to the encapsulant with picking up nozzle. Failure to comply might result in pick and place processes or damage to encapsulant. In the worst cases, catastrophic failure of the LEDs due to wire deformation and/or breakage.

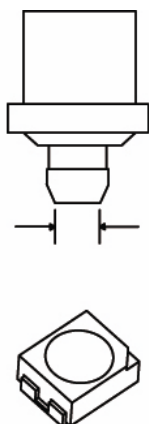

Notes:

All the information published is considered to be reliable. However, EDISON OPTO does not assume any liability arising out of the application or use of any product described herein.

EDISON OPTO reserves the right to make changes at any time without notice to any products in order to improve reliability, function or design.

EDISON OPTO products are not authorized for use as critical components in life support devices or systems without the express written approval from the managing director of EDISON OPTO.

Forward Voltage Ranks

Color of Emission	Bin	Min	Max	Unit
Red Amber Yellow	VD	1.8	2.1	V
	VE	2.1	2.4	
	VF	2.4	2.8	

Table 12: Forward voltage rank at $I_f=20\text{mA}$ and $T_a=25^\circ\text{C}$

Notes:

Forward voltage measurement allowance is $\pm 0.1\text{V}$.

Luminous Intensity Ranks

Color of Emission	Bin	Min	Max	Unit
Red Amber Yellow	G	300	350	mcd
	H	350	400	
	I	400	500	
	J	500	600	
	K	600	700	

Table 13: Luminous intensity rank at $I_f=20\text{mA}$ and $T_a=25^\circ\text{C}$

Notes:

Luminous Intensity Measurement Allowance is $\pm 10\%$

Dominant Wavelength Ranks

Color of Emission	Bin	Min	Max	Unit
Red	Full	620	630	nm
Amber	W	610	615	
	X	615	620	
	W	585	588	
Yellow	X	588	591	
	Y	591	595	

Table 14: Dominant Wavelength rank at $I_f=20\text{mA}$ and $T_a=25^\circ\text{C}$

Notes:

Dominant Wavelength is measured with an accuracy of $\pm 1\text{nm}$